

## FRONT WHEEL/SUSPENSION/STEERING

Wipe oil off the spring thoroughly using a clean cloth.  
Install the fork spring with the tightly wound end facing down.




Install the spring seat and spring collar.

Apply fork fluid to a new O-ring.  
Install a new O-ring onto the fork bolt and install it loosely.

NOTE:

Install the fork bolt but do not tighten yet.

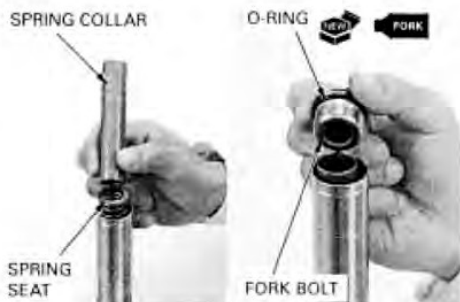

## INSTALLATION

Install the fork leg and temporarily tighten the fork bottom pinch bolt.



Install the following:

— handlebars (page 14-5)

Loosen the handlebar pinch bolt.  
Loosen the fork bottom pinch bolt and align the stopper ring groove with upper surface of the handlebar.

