


BRAKE SYSTEM

ASSEMBLY

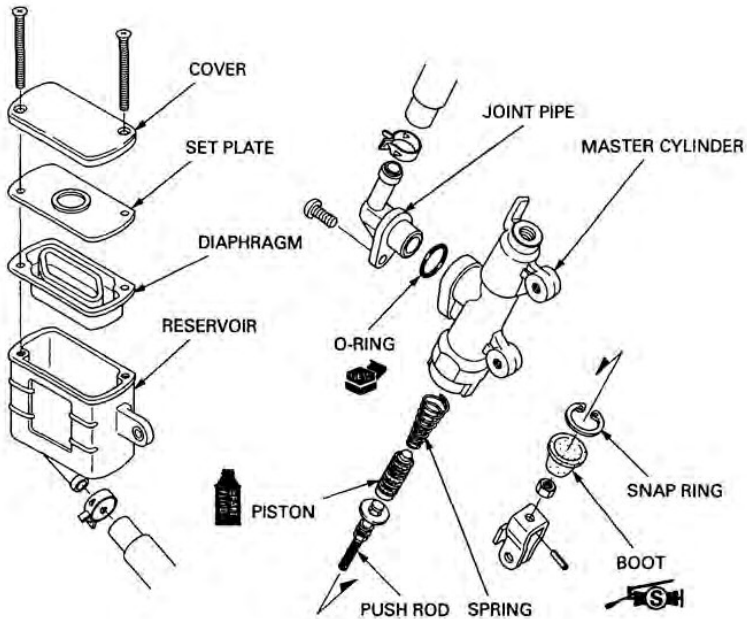


NOTE:

- Make sure that each part is free from dust or dirt before reassembly.

Coat the piston cups with the recommended brake fluid. Apply silicone grease to the push rod contacting area of the master cylinder.

Install the spring onto the master piston.

Install the spring, master piston and push rod into the master cylinder.

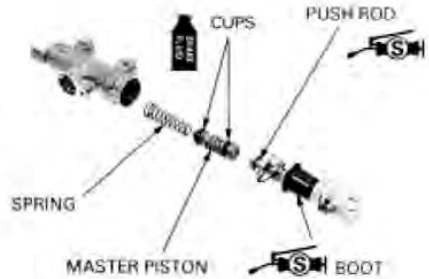

Install the snap ring using the special tool.

TOOL:

Snap ring pliers

07914 - SA50001

Install the boot.

