



6. With the fork tube held upright, measure the oil level (4) from the top of the tube.

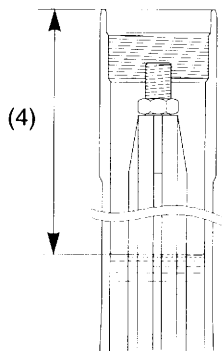

(4) oil level


7. Adjust the oil level by adding or removing the oil with an after market syringe (5).

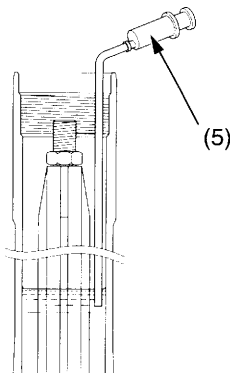

(5) syringe


## Fork Oil Level (CRF150R)

### Standard 0.34 kgf/mm (19.0 lbf/in) Fork Spring




Standard oil level [capacity]	123.0 mm 4.84 in [357.0 cm <sup>3</sup> (12.07 US oz, 12.57 Imp oz)]	
Maximum oil level [capacity]	123.0 mm 4.84 in [357.0 cm <sup>3</sup> (12.07 US oz, 12.57 Imp oz)]	Slightly stiffer as it nears full compression.
Minimum oil level [capacity]	189.0 mm 7.44 in [303.7 cm <sup>3</sup> (10.27 US oz, 10.69 Imp oz)]	Slightly softer as it nears full compression.

### Optional Softer 0.32 kgf/mm (17.9 lbf/in) Fork Spring



Standard oil level [capacity]	127.7 mm 5.03 in [353.2 cm <sup>3</sup> (11.95 US oz, 12.43 Imp oz)]	
Maximum oil level [capacity]	127.7 mm 5.03 in [353.2 cm <sup>3</sup> 11.95 US oz, 12.43 Imp oz]	Slightly stiffer as it nears full compression.
Minimum oil level [capacity]	193.7 mm 7.63 in [299.9 cm <sup>3</sup> (10.14 US oz, 10.56 Imp oz)]	Slightly softer as it nears full compression.

### Optional Stiffer 0.36 kgf/mm (20.2 lbf/in) Fork Spring



Standard oil level [capacity]	128.3 mm 5.05 in [352.7 cm <sup>3</sup> (11.93 US oz, 12.42 Imp oz)]	
Maximum oil level [capacity]	128.3 mm 5.05 in [352.7 cm <sup>3</sup> (11.93 US oz, 12.42 Imp oz)]	Slightly stiffer as it nears full compression.
Minimum oil level [capacity]	194.3 mm 7.65 in [299.4 cm <sup>3</sup> (10.13 US oz, 10.54 Imp oz)]	Slightly softer as it nears full compression.

(cont'd)