


2. Dry the scooter, start the engine, let it run for several minutes.

⚠ WARNING

- After washing the scooter the braking efficiency may be temporarily reduced.
- Anticipate longer stopping distances to avoid a possible accident.
- Do not clean the plastic parts with solvents that contain abrasives. They could cause the plastic to become opaque or streaked.

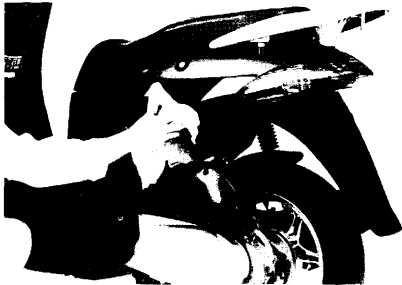

3. Test the efficiency of the brakes before using the scooter. Sever applications may be necessary to restore normal braking performance.

TESTING THE BRAKES

