


8. Loosen the left axle pinch bolts.
9. On the left side, withdraw the front axle shaft, and remove the side collars and wheel.

**CBR1000RR/RA**



**CBR1000S1/S2**

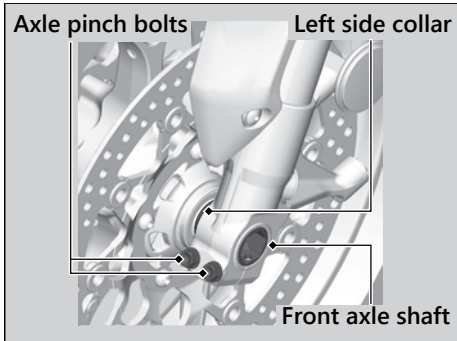