


Throttle Limiter Activation

RIGHT HANDLEBAR

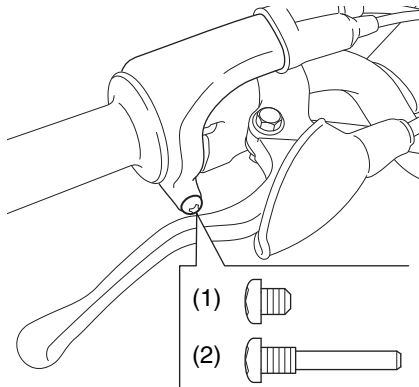

- (1) M6 × 6 screw
- (2) throttle stopper screw

You can reduce throttle grip movement.

1. Remove the M6 × 6 screw (1) from the throttle housing.
2. Replace the M6 × 6 screw with throttle stopper screw (2) provided and tighten it fully.

When the M6 × 6 screw is installed, the throttle can be fully opened.

When the throttle stopper screw is installed, the throttle opening is restricted to approximately 50% and the maximum engine speed is limited.

Do not remove the screw except when activating or deactivating the limiter.

Use only provided screws. Do not use any other screw.

Never operate the motorcycle without either the M6 × 6 screw or throttle stopper screw installed as debris can enter the housing and cause the throttle to bind.