


Spark Arrester

Refer to *Safety Precautions* on page 43.

The spark arrester must be serviced every 100 operating hours to maintain its efficiency.

Regular servicing prevents carbon buildup (which can diminish engine performance) and also complies with USDA regulations for regular maintenance to assure proper function. The spark arrester prevents random sparks from the combustion process in your engine from reaching the environment.

RIGHT REAR

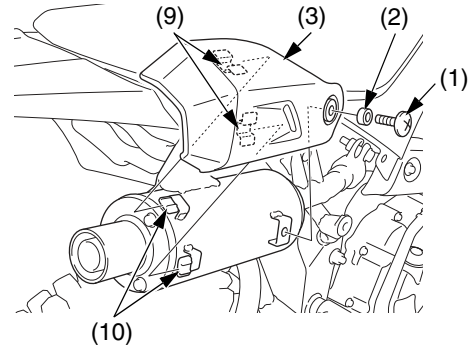

- | | |
|----------------------------|-----------|
| (1) muffle protector screw | (9) slots |
| (2) collar | (10) tabs |
| (3) muffle protector | |

1. Allow the engine and muffler to cool.
2. Remove the right side cover (page 56).
3. Remove the muffle protector screw (1), collar (2) and muffle protector (3).

(cont'd)