


SPROCKETS INSPECTION

Inspect the drive and driven sprocket teeth for wear or damage, replace if necessary.

Never use a new drive chain on worn sprockets.

Both chain and sprockets must be in good condition, or the new replacement chain will wear rapidly.

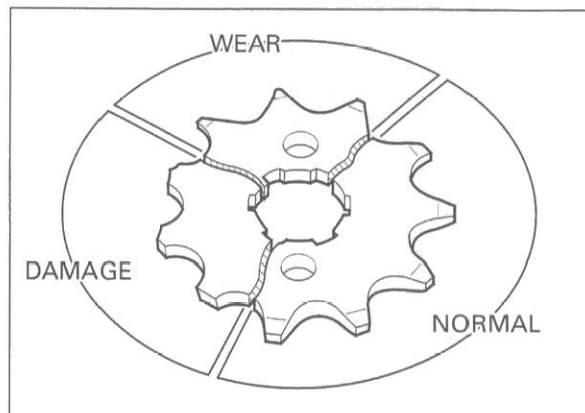


Check the attaching bolts and nuts on the drive and driven sprockets.

If any are loose, torque them.

TORQUE:

Drive sprocket bolt: 54 N·m (5.5 kgf·m , 40 lbf·ft)

Driven sprocket nut: 108 N·m (11.0 kgf·m , 80 lbf·ft)

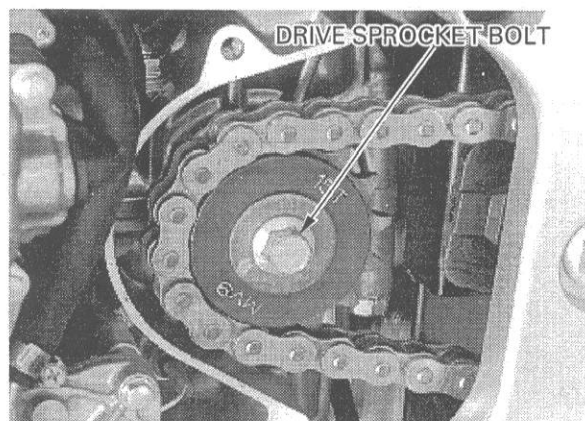

REPLACEMENT

This motorcycle uses a drive chain with a staked master link.

Loosen the drive chain (page 3-18).

Assemble the special tool as shown.

TOOL:

Drive chain tool set 07HMH-MR10103

NOTE:

When using the special tool, follow the manufacturer's instruction.

