



Install the exhaust joint pipe clamp while aligning its boss with the groove on the muffler pipe.
Install and temporarily tighten the SH bolt.



Install new gaskets onto the exhaust ports of the cylinder head.
Install a new gasket onto the exhaust pipe.
Install the exhaust pipe assembly into the joint pipe and cylinder head.

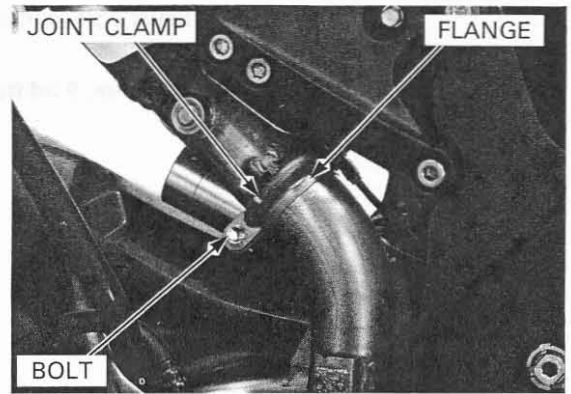

Install the exhaust pipe joint nuts.

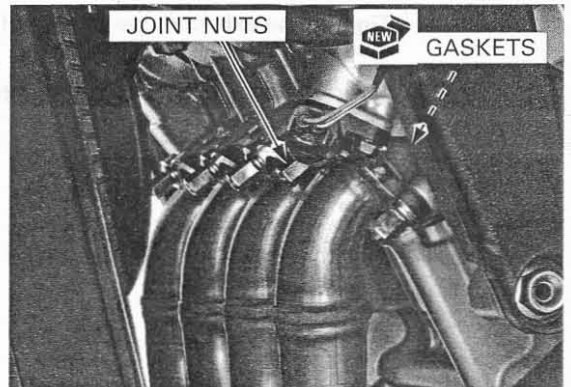

Install the exhaust pipe mounting bolt/washer.

