



REAR WHEEL/SUSPENSION

Install the drive sprocket cover and tighten the bolts securely.
Install the clutch lifter rod.

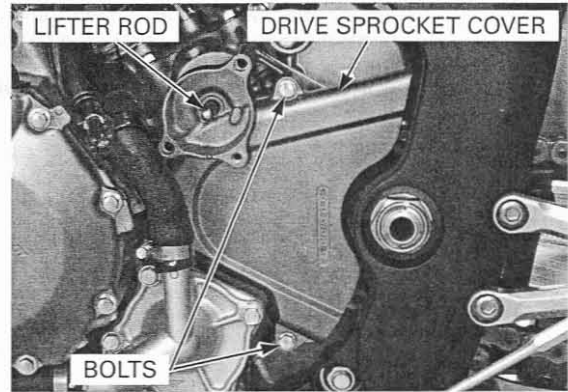

Install the gearshift arm aligning its slit with the punch mark on the gearshift spindle.
Tighten the gearshift arm pinch bolt securely.
Install the clutch slave cylinder (page 10-15).

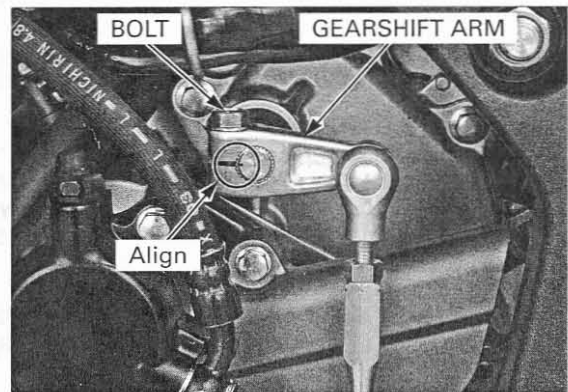

Install the brake hose guide between the inner fender and swing-arm.

Install the rear brake hose guide and tighten the bolt securely.

Install the following:

- Shock absorber (page 15-16)
- Suspension linkage (page 15-19)
- Rear wheel (page 15-13)

