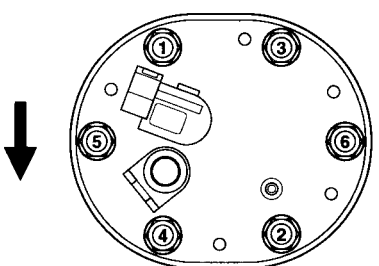


# GENERAL INFORMATION

FRAME	Q'TY	THREAD DIA. (mm)	TORQUE N-m (kgf-m, lbf-ft)	REMARKS
<b>FRAME BODY PANELS/EXHAUST SYSTEM:</b>				
Side stand pivot bolt	1	10	10 (1.0 , 7)	NOTE 8
Side stand pivot lock nut	1	10	29 (3.0 , 22)	
Main stand mounting bolt	1	10	54 (5.5 , 40)	
Main footpeg holder socket bolt	4	8	26 (2.7 , 20)	
Pillion footpeg holder bolt	4	8	26 (2.7 , 20)	
Bank sensor	2	8	22 (2.2 , 16)	
Exhaust pipe joint nut	8	7	20 (2.0 , 14)	
Muffler band bolt	4	8	17 (1.7 , 12)	
Muffler bracket bolt	2	8	26 (2.7 , 20)	
Seat rail mounting bolt	4	10	44 (4.5 , 33)	
<b>FUEL SYSTEM (Programmed Fuel Injection):</b>				
Fuel tube sealing nut (throttle body side)	1	12	22 (2.2 , 16)	
Fuel tube banjo bolt (fuel tank side)	1	12	22 (2.2 , 16)	
Service check bolt	1	6	15 (1.5 , 11)	
Fuel pump mounting nut	6	6	12 (1.2 , 9)	
				
Fuel filler cap bolt	0	4	2 (0.2 , 1.4)	
<b>ENGINE MOUNTING:</b>				
Side stand bracket bolt	2	10	54 (5.5 , 40)	
Engine hanger nut (rear/upper)	1	12	64 (6.5 , 47)	
Engine hanger nut (rear/lower)	1	12	64 (6.5 , 47)	
Engine hanger bolt	3	10	40 (4.1 , 30)	
Engine hanger adjusting bolt	2	22	11 (1.1 , 8)	
Engine hanger adjusting bolt lock nut	2	22	54 (5.5 , 40)	
<b>CLUTCH/GEARSHIFT LINKAGE:</b>				
Clutch master cylinder holder bolt	2	6	12 (1.2 , 9)	
Clutch master cylinder cap screw	2	4	1 (0.15 , 1.1)	
Clutch lever pivot bolt	1	6	1 (0.1 , 0.7)	
Clutch lever pivot nut	1	6	6 (0.6 , 4.3)	
Clutch lever adjuster	1	5	4 (0.4 , 2.9)	
Clutch switch screw	1	4	1 (0.12 , 0.9)	
Gearshift pedal bolt	1	6	10 (1.0 , 7)	
<b>FRONT WHEEL/SUSPENSION/STEERING:</b>				
Handlebar pinch bolt	2	8	26 (2.7 , 20)	NOTE 8 See page 13-32
Handlebar weight mounting screw	2	6	10 (1.0 , 7)	
Steering stem nut	1	24	103 (10.5 , 76)	
Top thread A	1	26	25 (2.5 , 18)	
Top thread B	1	26		
Fork top bridge pinch bolt	2	8	23 (2.3 , 17)	NOTE 8  NOTE 2
Fork bottom bridge pinch bolt	2	10	49 (5.0 , 36)	
Front axle bolt	1	14	59 (6.0 , 43)	
Front axle holder bolt	4	8	22 (2.2 , 16)	
Front brake disc mounting bolt	12	6	20 (2.0 , 14)	
Fork cap	2	37	23 (2.3 , 17)	
Fork socket bolt	2	8	20 (2.0 , 14)	
Fork damper lock nut	2	10	20 (2.0 , 14)	