

Pour the specified amount of recommended fork fluid into the fork pipe.

RECOMMENDED FORK FLUID:

Pro Honda Suspension Fluid SS-8

FORK FLUID CAPACITY:

483 ± 2.5 cm³ (16.3 ± 0.08 US oz,
17.1 ± 0.09 Imp oz)

Pump the damper rod several times.




Measure the oil level from the top of the fork pipe while compressing the pipe all the way after stroking the fork pipe slowly more than 5 times and the damper rod more than 10 times.


NOTE:

Be sure the oil level is the same in the both forks.

FORK OIL LEVEL: 142 mm (5.6 in)

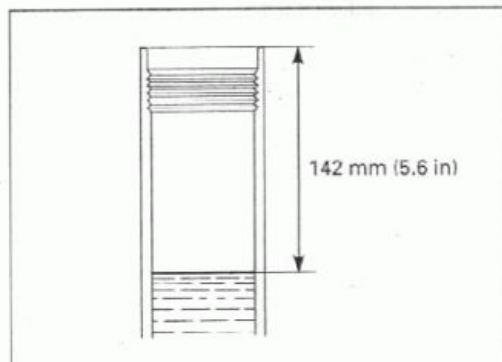

Pull the damper rod up and install the fork spring with the tapered end facing down.

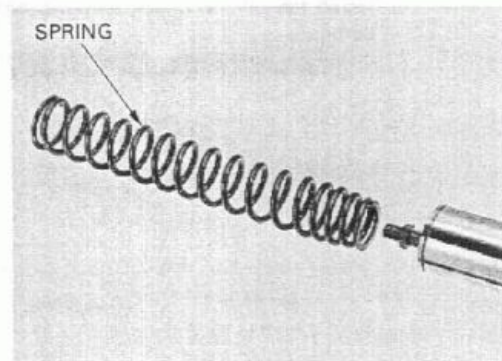

Install the spring joint plate.

Screw the damper rod end nut fully by hand.

